


# CAT7A SFTP 23AWG 1000MHZ CABLE

TN5009C7A23S1000M

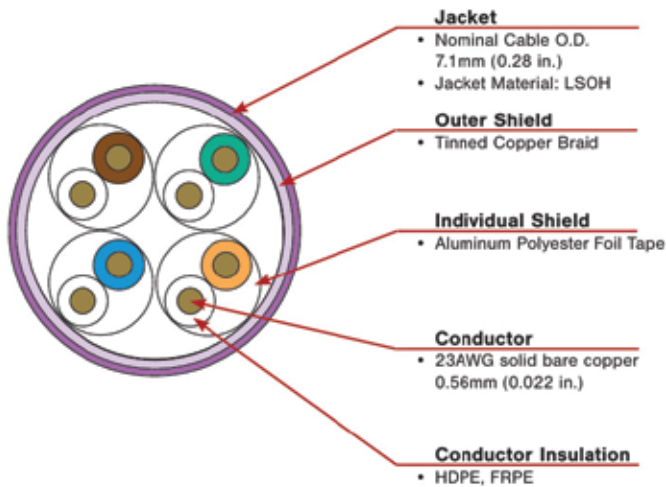

## Product Description

TEXA Network’s fully shielded Category 7A1000 MHz end-to-end cabling solution is the highest-performing, most secure twisted-pair copper cabling system available. TEXA Network’s Category 7A 1000 MHz SFTP cable perfectly complements the performance of the TERA outlet exceeding all ISO/IEC requirements for Category 7A/Class FA transmission performance. A fully shielded cable with individual foils around each pair coupled with a high screen coverage outer braid provides perfect immunity from outside interferences. In addition, the cable jacket has been qualified for mechanical reliability in high temperature environments up to 75°C. In PoE remote power applications, this cable can be installed in environments up to 60°C and will not experience degradation due to heat rise inside the cable bundle. Further,

## CABLE FEATURES

- S/FTP
- Nominal jacket OD: 7.7mm (0.30 in.)
- 0.57mm (0.022 in.) solid (non-tinned) copper
- Sequential measurement markings on jacket
- Pairs individually shielded with aluminum-polyester foil
- Overall tinned-copper braid
- 75° C temperature rating

## APPLICATIONS SUPPORT

- 10GBASE-T
- 1000BASE-T
- 100BASE-T
- 10BASE-T
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)

## ELECTRICAL SPECIFICATIONS

## PHYSICAL PROPERTIES

DC Resistance	<7.32 Ω/100m
DC Resistance Unbalance	2%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	≤160 pF/100m
Characteristic Impedance (ohms)	1-100 MHz: 100 ± 15% 100-250 MHz: 100 ± 22% 250-1000 MHz: 100 ± 25%
NVP	70%
TCL	40-10 log(f) dB
Delay Skew	25ns/100m

Pulling Tension (max)	110N (25 lbf)
Bend Radius (min)	50mm (2.0 in.)
Installation Temperature	0 to 75°C (+32 to 167°F)
Storage Temperature	-20 to 75°C (-4 to 167°F)
Operating Temperature	-20 to 75°C (-4 to 167°F)

## TRANSMISSION PERFORMANCE

Freq. (MHz)	Insertion Loss (Max. dB)		NEXT (Min. dB)		PS NEXT (dB)		ACR-N (dB)		PSACR-F (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		Return Loss (dB)	
	1.9	1.6	78.0	105.0	75.0	102.0	76.1	103.0	73.1	100.0	77.0	96.0	75.0	94.0	20.0	31.0	536	512
1.0	1.9	1.6	78.0	105.0	75.0	102.0	76.1	103.0	73.1	100.0	77.0	96.0	75.0	94.0	20.0	31.0	536	512
4.0	3.5	3.0	78.0	105.0	75.0	102.0	74.6	102.0	71.6	99.0	77.0	96.0	75.0	94.0	23.0	34.0	518	494
10.0	5.4	4.9	78.0	105.0	75.0	102.0	72.6	100.0	69.6	97.0	74.0	96.0	71.0	94.0	25.0	35.0	511	487
16.0	6.8	6.3	78.0	105.0	75.0	102.0	71.2	99.0	68.2	96.0	70.0	96.0	67.0	94.0	25.0	35.0	509	485
20.0	7.5	7.0	78.0	105.0	75.0	102.0	70.3	98.0	67.4	95.0	68.0	96.0	65.0	94.0	25.0	35.0	508	484
31.25	9.6	8.9	78.0	105.0	75.0	102.0	68.5	96.0	65.5	93.0	64.0	93.0	61.0	91.0	23.6	34.0	506	482
62.5	13.7	12.8	78.0	105.0	75.0	102.0	64.3	92.0	61.3	89.0	58.0	88.0	55.0	86.0	21.5	32.0	505	481
100.0	17.5	16.5	76.0	105.0	73.0	102.0	58.5	89.0	55.5	86.0	54.0	82.0	51.0	80.0	20.1	31.0	504	480
200.0	25.3	23.5	71.0	102.0	68.0	100.0	46.2	79.0	43.2	77.0	48.0	78.0	45.0	75.0	18.0	29.0	503	479
250.0	28.5	28.2	70.0	102.0	67.0	100.0	41.5	74.0	38.5	72.0	46.0	75.0	43.0	70.0	17.3	28.0	502	502
300.0	31.5	28.9	69.0	102.0	66.0	97.0	37.3	73.0	34.3	68.0	44.0	70.0	41.0	68.0	17.3	28.0	502	478
350.0	34.3	31.5	68.0	102.0	65.0	97.0	33.6	69.0	30.6	66.0	43.0	70.0	40.0	63.0	17.3	28.0	502	478
400.0	36.9	33.1	67.0	95.0	64.0	93.0	30.1	62.0	27.1	60.0	42.0	66.0	39.0	59.0	17.3	28.0	502	478
550.0	44.1	40.2	65.0	95.0	62.0	93.0	20.8	55.0	17.8	53.0	39.0	60.0	36.0	56.0	17.3	28.0	502	478
600.0	46.3	41.7	64.0	95.0	61.0	93.0	18.0	53.0	15.0	51.0	38.0	55.0	35.0	53.0	17.3	28.0	502	478
800.0	54.5	47.6	62.0	90.0	59.0	87.0	7.9	42.0	4.9	39.0	36.0	47.0	33.0	44.0	16.1	28.0	501	477
1000.0	62.0	54.5	61.0	85.0	58.0	83.0	-1.0	31.0	-4.0	29.0	34.0	40.0	31.0	38.0	15.5	27.0	501	477
1000.0	-	59.8	-	80.0	-	77.0	-	20.0	-	17.0	-	35.0	-	33.0	-	27.0	-	477

### Part Number

(TN5009C7A23S1000M)