


## COPPER PATCH CORD, CAT6A, UNSHIELDED, LSZH

PRODUCT	MODEL NO.
Copper Patch Cord, CAT6A, Unshielded, LSZH, 1M, Blue/Grey	TN5109PCC6AUSLS1M
Copper Patch Cord, CAT6A, Unshielded, LSZH, 2M, Blue/Grey	TN5110PCC6AUSLS2M
Copper Patch Cord, CAT6A, Unshielded, LSZH, 3M, Blue/Grey	TN5111PCC6AUSLS3M
Copper Patch Cord, CAT6A, Unshielded, LSZH, 5M, Blue/Grey	TN5112PCC6AUSLS5M

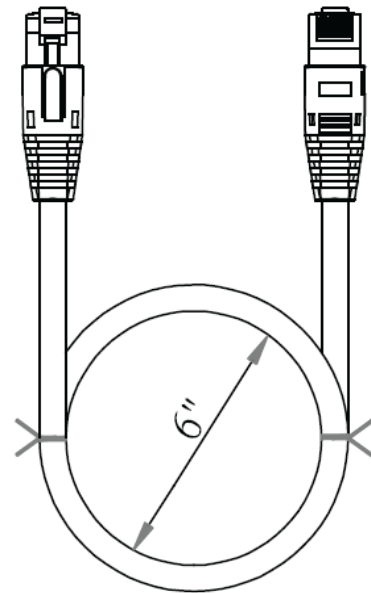

### Features/Benifits

- Meets all requirements specified in ANSI/TIA-568.2-D
- Low Smoke Zero Halogen
- Connector wiring T568B wire scheme.
- Fully interoperable and backwards compatible
- UL Listed and ETL Verified
- 25 Years System Warranty

## Product Description

TEXA Network's range of Category 6A Copper Patch Leads are designed for optimal performance and manageability. Our Patch Leads are designed to offer a slim profile specifically for today's high-density environments. Snag-less plug design makes these Patch Cords an excellent choice in environments where moves, adds and changes (MAC's) are frequent.

## TRANSMISSION PERFORMANCE

Near End Cross Talk	Meet all Requirements Specified in ANSI/TIA-568.2-D
Return Loss	Meet all Requirements Specified in ANSI/TIA-568.2-D

## MECHANICAL

Plug	
Assembly	Compatible with FCC Part 68 Subpart F
Housing	UL Listed 94V-0 Flame-Retardant PC (Polycarbonate)
IDC Blades	Phosphor Bronze. Contact area of blades is plated with 50 micro- inches of hard gold over 100 micro-inches of Nickel
Cordage	
Construction	CM c(UL) CMG 70°C FT4 4Pair 26AWG ANSI/TIA-568.2-D CAT6A - --S/FTP LSZH

## PHYSICAL

Plug Assembly	Polycarbonate, 94V-0, the contact Area of blades is plated with 50 micro- inches of hard gold over 100 micro-inches of Nickel
CAT6A Patch Cable	FR-PE Low Smoke Zero Halogen Jacket
Strain Relief	BASF TPU Low Smoke Zero Halogen