


Fiber Optic High Density Patch Panel 19" Rack Mount, 1U, 96F, Unloaded

TN7101PP191U

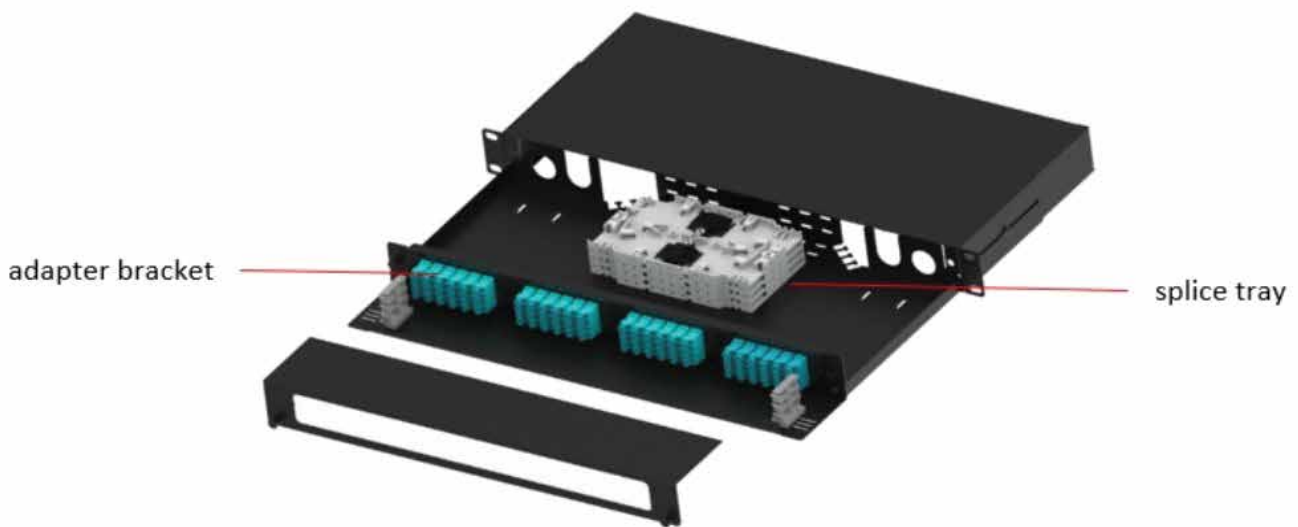


Product Description

TEXA Networks provides 19" Rack-mountable High Density Fiber Optic Patch Panel for splicing and/or termination of optical fibers in an indoor environment. Also, loaded type available with Multimode or Singlemode pigtails, splice accessories and adapters. The solution provides an optical channel that is guaranteed to be compliant with the ISO 11801 International Standard for Structured Cabling. TEXA Network quality personals ensures product reliability through rigorous qualification testing to assure cable performance and durability in adverse field environments. Excellent quality control is achieved through intense in- house quality check and stringent audit acceptance by ISO 9001.


Features & Benefits

- High Density 19" Rack-mountable: 1U
- Easy to install.
- Tool Free Removal Cover Plate above adapter field with Transparent plate in front for easy viewing and Dust-Proof.
- Comes in Unloaded and loaded versions
- The body is made of High Grade Metal Plate
- Cable Fixing and Grounding Devices installed within Patch Panel
- Internal cable management
- Accommodates Splicing and/or Direct Termination
- Accepts DME PROLINK compliant adapters/couple
- 25 Years System Warranty

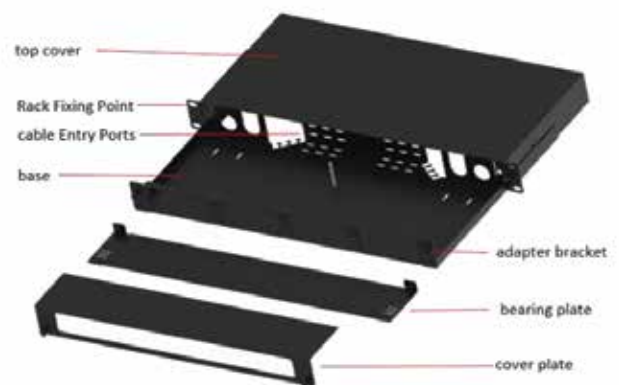

Technical Specification

- Product Dimension for 3U: 482mm (W) X 44mm (H) X271.5mm (D)
- Operating Temperature: Indoor Type : -20°C to +85°C;

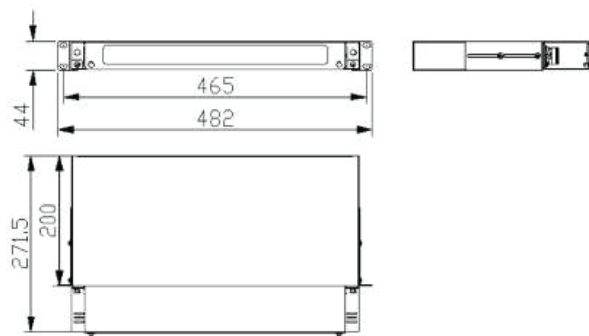

Part Number

TN7101PP191U

Fiber Optic High Density Patch Panel, 96 Port (Unloaded), 1RU, 19 inch Rack mountable with in-built Splice Tray, Black