


DOUBLE SHEATH ARMORED OUTDOOR FIBER OPTIC CABLE MULTI LOOSE TUBE UV PROOF HDPE SHEATH

TN7002DSAMLT

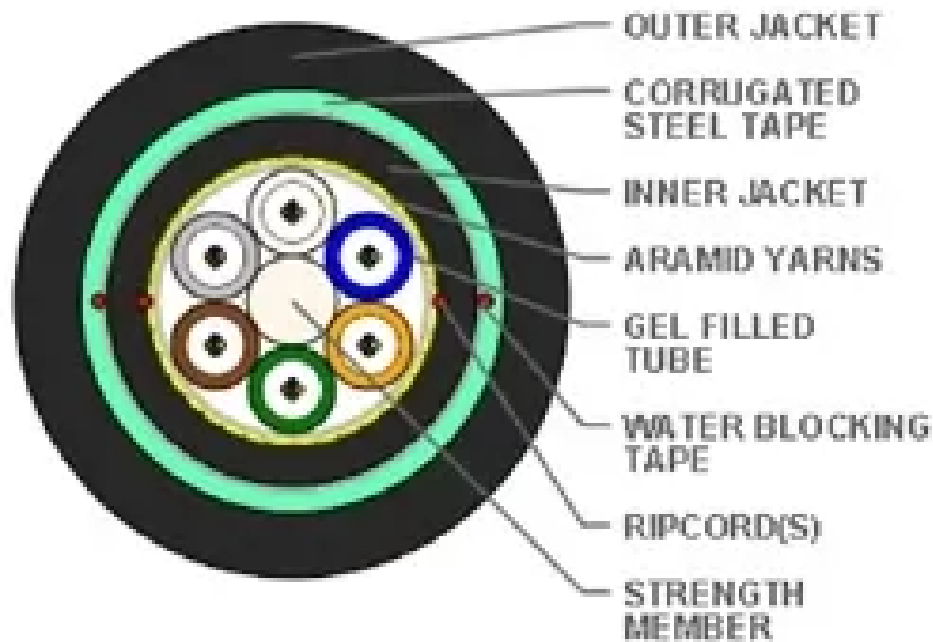

Description

TEXA NETWORK's Double Sheath Armored Outdoor MLT FO cable are typically used for outside plant (OSP) applications. These cables are suitable for direct burial as well as for duct/tray applications. This cable can be installed by trenching techniques. These cables can also be installed in ducts by standard pulling standard methods. This cable can be traced by means of metallic tracer machine in the field. The cable consists of color coded optical fibers placed in a central tube along with gel to protect from water ingress and is surrounded with strength yarns which provides tensile strength to the core. Thermoplastic sheath over the dielectric armor layer makes the cable user friendly.

The Fiber used in TEXA NETWORK's Fiber Optic cables, are made of pure silica and germanium doped silica. A UV curable acrylate material is applied over the Fiber Cladding as primary protective coating. TEXA NETWORK's quality personals ensures product reliability through rigorous qualification testing to assure cable performance and durability in adverse field environments. Excellent quality control is achieved through intense in-house quality check and stringent audit acceptance by ISO 9001.

Features & Benefits

- Steel Tape Armor adds to crush resistance as well as can be used for cable locator after installation
- PE Jacket provide Rodent Protection along with improved Crush and Impact Protection
- UV Protected
- Easily removable thermoplastic jacket rugged
- Flexible, Light weight, easy to handle & install
- Excellent Tensile strength and Crush resistant

Features & Benefits

- IEC 60793-1: Optical Fiber Part 1: Generic Specification
- IEC 60793-2: Optical Fiber Part 2: Product Specification
- IEC60794
- ANSI/ICEAS-87-640
- Telcordia GR-20
- ITU-T/RoHS/REACH

Construction of Fiber Optic Cable

Fiber count	24
Fiber Type	ITU-T G.652D
Maximum Cabled Attenuation (dB/km)	1310nm: 0.35 1550nm: 0.23
PMD LDV (ps/sqrt.km)	</= 0.1
Fibers per Tube Fibre Color Sequence	4 Blue, Orange, Green, Brown
Central Strength Member	FRP (Fibre Reinforced Plastic)
No of Tubes	6
Tube Color Sequence	Blue, Orange, Green, Brown, Slate, White
Peripheral Strength Members	High Strength Aramid Yarns
Inner Sheath Material	Black HDPE
No. of Ripcords below Inner Sheath	2
Metallic Armoring	Corrugated Steel Tape
No. of Ripcords below Tape	2
Outer Sheath Material	UV Proof HDPE (Black)
Cable OD	15.2 ± 0.5mm
Cable weight	205 kg/km ± 10%
Cable Length	6KM ± 5%

Mechanical & Environmental Characteristics of Fiber Optic Cable

Tensile Strength Short Term (IEC 60794-1-2-E1)	7000N
Tensile Strength Long Term (IEC 60794-1-2-E1)	4000N
Crush Resistance (IEC 60794-1-2-E3)	4000N/100mm
Impact Resistance (IEC 60794-1-2-E4)	10 Nm
Torsion (IEC 60794-1-21-E7)	± 180°
Min. Bend Radius During Installation (IEC 60794-1-21-E11)	20 D
Min. Bend Radius After Installation (IEC 60794-1-21-E11)	15 D
Water Penetration Test (IEC-60794-1-22-F5)	1m waterhead, 3m samples, 24 h
Drip Test (IEC-60794-1-21-E14)	30 cm, 70°C, 24 h
Temperature Performance (IEC 60794-1-22-F1)	Max. change in attenuation shall be \leq 0.15 dB/km Installation -10°to +70°C Operation -40°to +70°C Storage -40°to +70°C

Part Number

(TN7002DSAMLT)

Double Sheath Armored (Corrugated Steel Tape) Outdoor Fiber Optic Cable, 24 core, Multi Loose Tube, SM-G.652D, Inner Sheath: HDPE and Outer Sheath: UV Proof HDPE, Black